



①




④

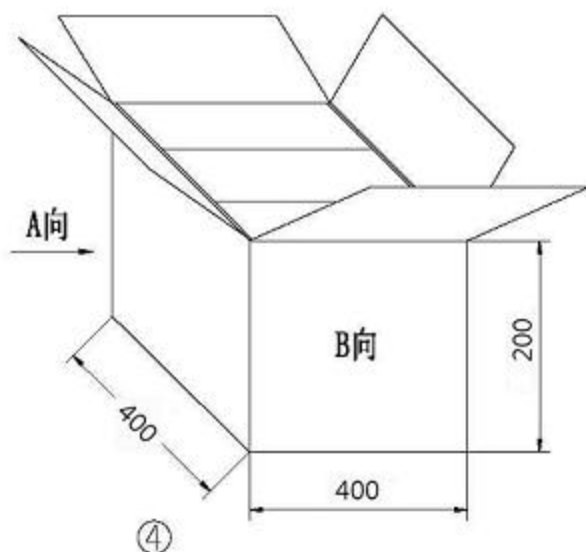

A向视图

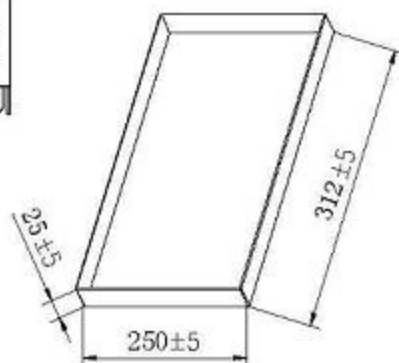


② 上盖 (Cover)

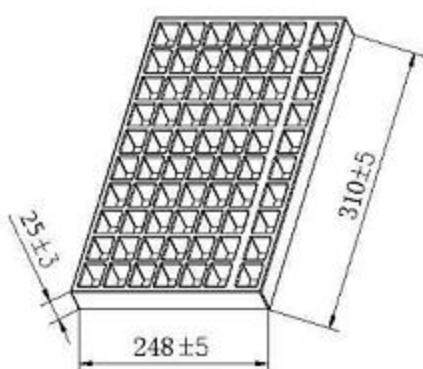

③ 底盖 (Base)






B向视图

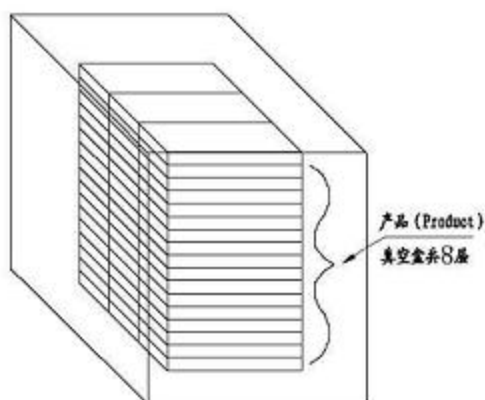

透视图 (Scenograph)

| 序号 (NO.)   | 名称 (Name)          | 型号规格 (Model)<br>长x宽x高 (mm) (LongxWidexHigh) | 包装规格 (Pack Specification) |
|------------|--------------------|---------------------------------------------|---------------------------|
| 4          | 纸箱 (Cardboard box) | 400x400x200                                 | Q'TY 8盒/箱 (Trey/CTN)      |
| 3          | 底盖 (Base)          | 310x248x33                                  |                           |
| 2          | 上盖 (Cover)         | 312x250x25                                  | 40 PCS/盒 (Dish)           |
| 1          | 产品 (Product)       | 59.12x21.30x13.60                           |                           |
| 电话 (tel)   |                    | CSCE                                        | CTC                       |
| 传真 (fax)   |                    |                                             |                           |
| 单位 (unit)  | MM                 | 设计 (draw)                                   | 审核 (ch'k)                 |
| 比例 (scale) | 1:1                | 审核 (ch'k)                                   | 审核 (ch'k)                 |
| 版本 (rev.)  | A / 1              | 标准 (app'l'd)                                | 标准 (app'l'd)              |
| 视图 (view)  |                    | 日期 (date)                                   | 2007.08.18                |

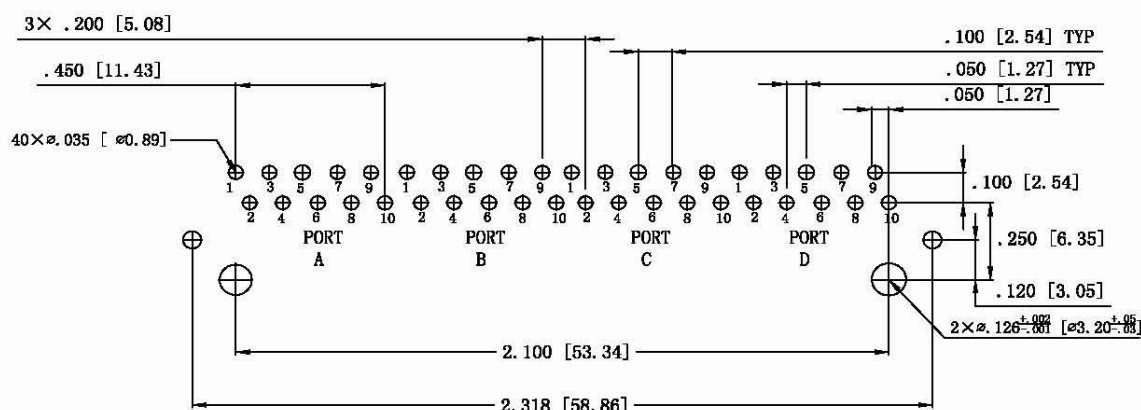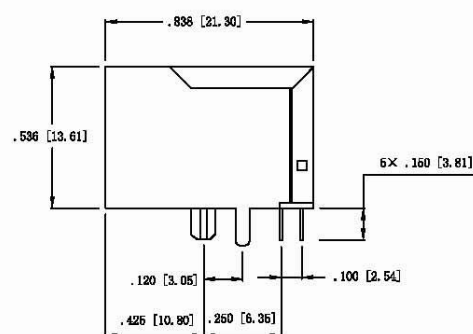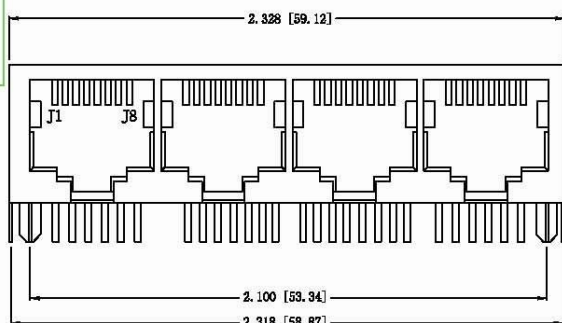

## ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN  
30-60MHZ -14.0dB MIN  
60-80MHZ -10.0dB MIN

Cross Talk: 1-30MHZ -40.0dB MIN  
30-60MHZ -35.0dB MIN  
60-80MHZ -30.0dB MIN

CMR: 1-100MHZ -35.0dB MIN

Hi-Pot: 1500v AC 6S 1mA


Turn Ratio: 1CT:1CT+/-3%

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact are

Housing Material: PBT Black

Operating temperature range:0°C to +70°C

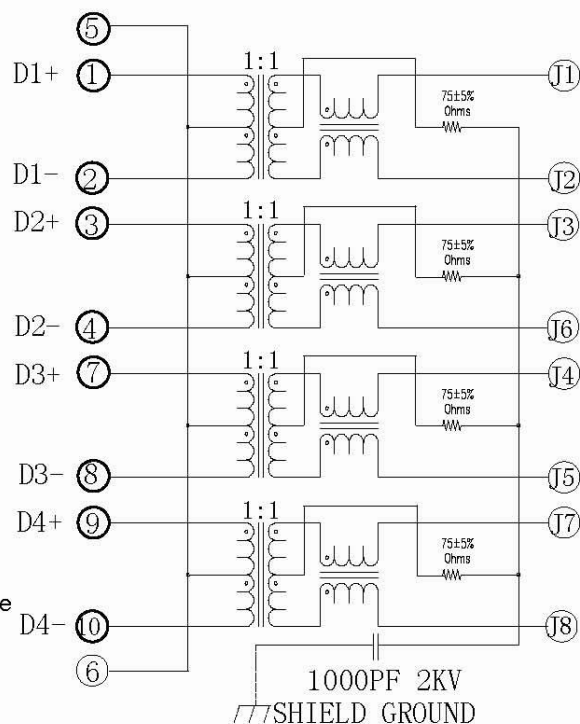

Drafted by:CHEN

UNIT : mm

. xx +/-0.25, . xxx +/-0.13

1000BASE  
1X4 Tab-Down RJ45

Approved By: JPGong

Part No:CSCE-401QWWNL C

REV.

SHEET 1 OF 1