REV. LTR.	DESCRIPTION	SIGN	DATE

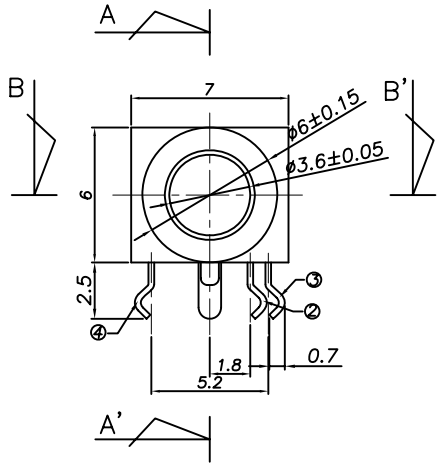

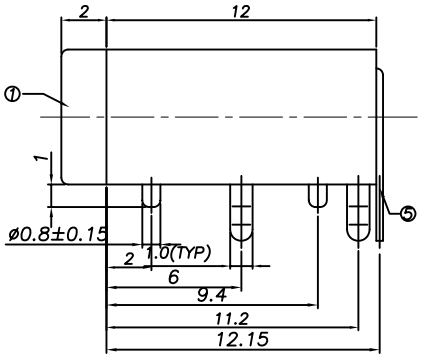



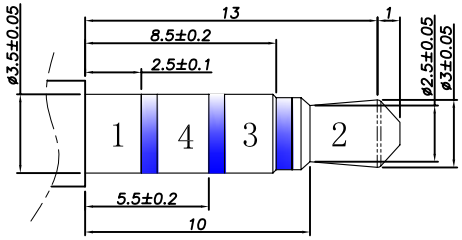

ø3.5 MATE PLUG

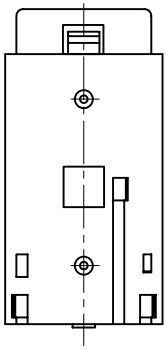

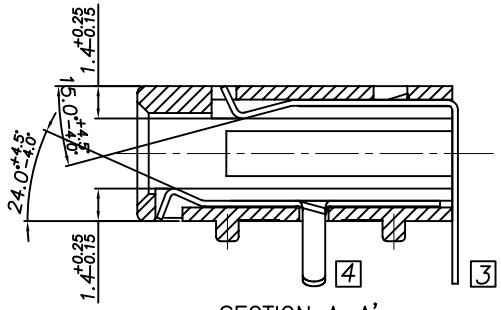

SECTION A–A'

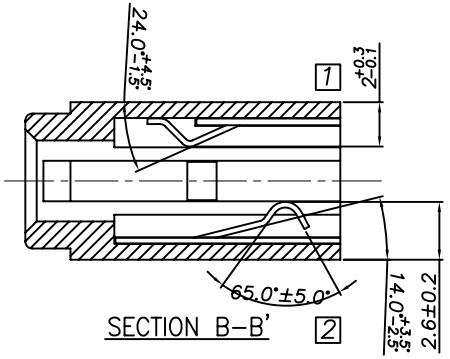

SECTION B–B'

Model NO.	PJ30660–M
Schematic	

P.C.B Layout
(Copper-sided view)

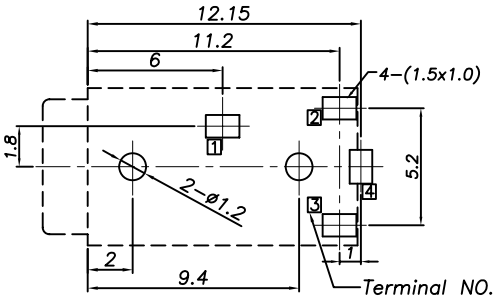

SPECIFICATION
1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤30mΩ;
3.Insulation resistance: ≥100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3–30N;
6.life test: 5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING
⑤	Ring spring–2 [4]	1	Phosphor bronze	PJ30660–04	Ag–Plating
④	Ring spring–1 [3]	1	Phosphor bronze	PJ30660–03	Ag–Plating
③	Tip spring [2]	1	Phosphor bronze	PJ30660–02	Ag–Plating
②	Earth spring [1]	1	Phosphor bronze	PJ30660–01	Ag–Plating
①	Housing	1	PBT	PJ30660–S1	

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4		PAGE 1 OF 1	
	Ø3.5 PHONE JACK	PJ30660-_ PB_ _S004	TOLERANCE	ANGLES	SCALE	VER
			±0.3	±2°	FULL	03

DESIGNER BY:	Zhuhong 2008/11/18
CHECK BY:	
APPROVED BY:	

CTC Connection Technologies Corporation