


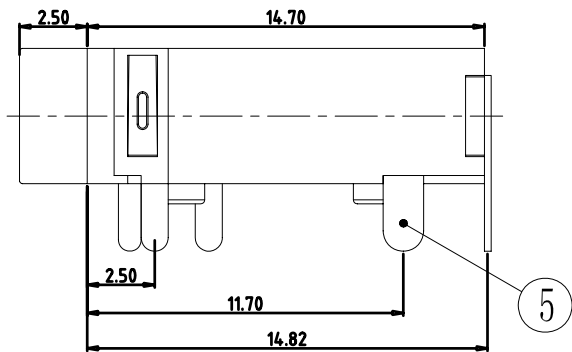

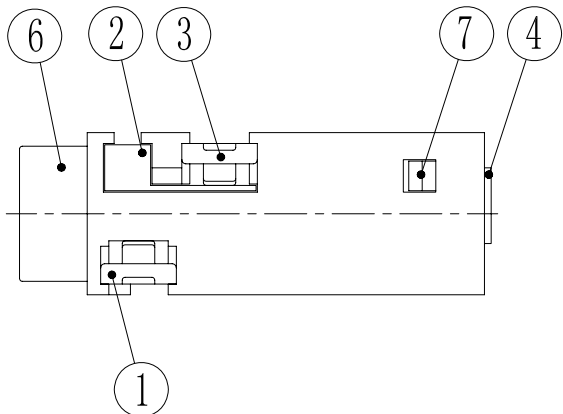


DRAWING	X.XX
TOLERANCE	±0.3




CIRCUIT DIAGRAM

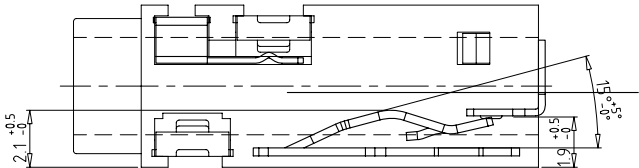


SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 30m\Omega$;
- 3.Insulation resistance: $\geq 100m\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.

품번 No	부품명 PART NAME	수량 Q'TY	재질 MATERIAL	색상 COLOR	처리 FINISH	비고 REMARK
01	GROUND	1	Phosphor bronze	Silver	Ag-Plating	
02	SWITCH-1	1	Phosphor bronze	Silver	Ag-Plating	
03	SPK-1	1	Phosphor bronze	Silver	Ag-Plating	
04	SWITCH-2	1	Phosphor bronze	Silver	Ag-Plating	
05	SPK-2	1	Phosphor bronze	Silver	Ag-Plating	
06	HOUSING	1	PPA	Black		
07	BLOCK	1	PPA	Black		

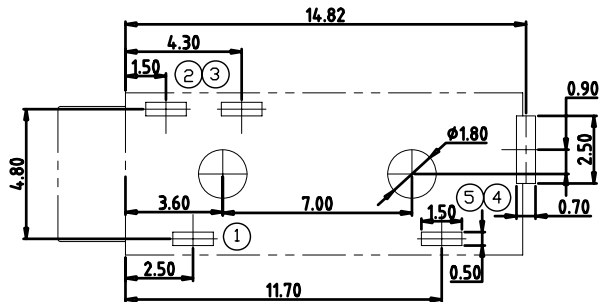

P. C. B LAYOUT

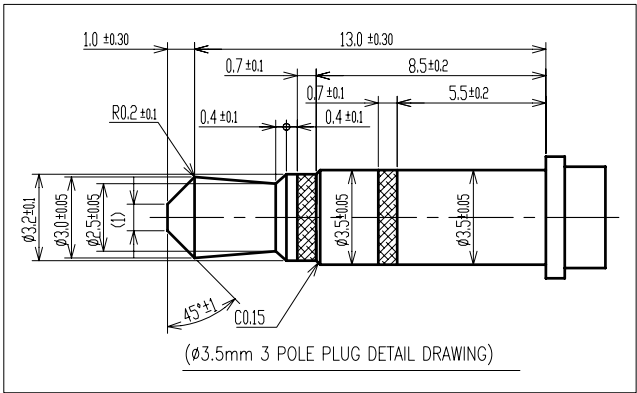

△					설계 DES'N BY	검도 CH'D BY	승인 APPROVE BY	작성일자 DWG DATE	모델명 MODEL NAME	EAR PHONE JACK 3 POLE	
△								14.09.02			
△								척도 SCALE	단위 UNITS	부품명 PART NAME	제품규격 STANDARD
△								N/S	mm	ASSEMBLY	PJ-328A
No	내	용	작성일	작성자	승인	CTC Conntction Technology Corporation		투상법 PROJECTION	도번 DWG NO	제품코드 ERP CODE	